



Datasheets

Net cleaning

Hose drum

Easier use and better storage

Camera

good overview on the nets condition

Less fuel consume

Save operation costs

Lower pressure

Less noise

Little maintenance

Save operation costs

Gentle clean

Low pressure, high flow

Less wear on net, better fish welfare

Good cleaning result

3 efficient cleaning disks

Satisfies fish and customers

Handles currents well

Less downtime


Wide contact

Wide wheels and belts

Easy cleaning in the whole net,




good contact in top,

easy maneuver

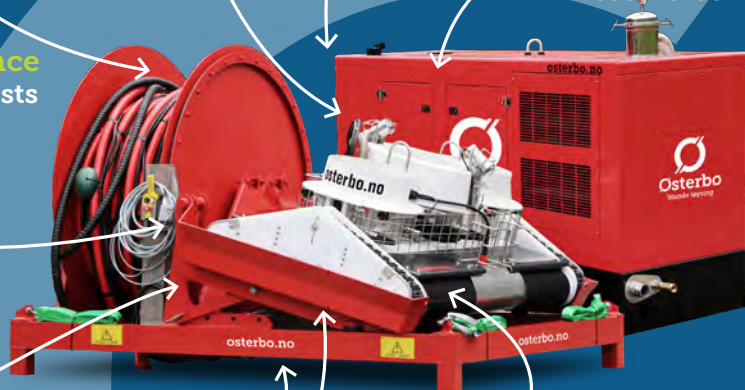

Net cleaner

Osterbo Yanmar NCL-LX

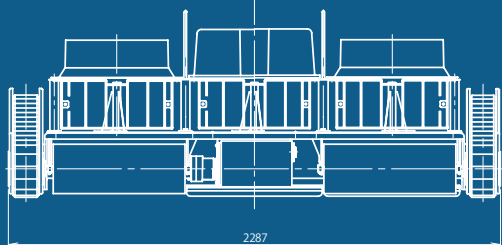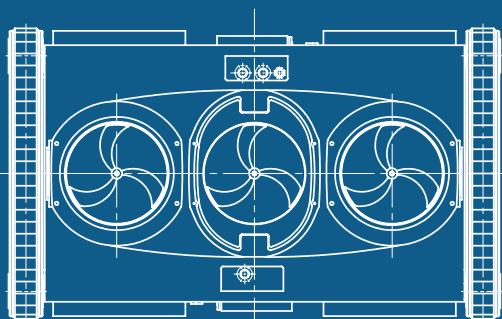

PARTS	SPEKS.
Cleaning width	1910 mm
Max travel speed	21 m/min
Max cleaning speed	2 200 m ² /h
Max depth	50 m
Robot	
External dimensions	L 1350 x W 2287 x H 874 mm
Weight	600 kg
Propeller	450 mm dia x 3
Wheels	2row rubber crawlers + 4 wide tires
Drive unit	DC-motor with reduction gear - 48VDC
Water depth sensor	Pressure type x 1
Camera	CCD with wide angel lens x 2
LED-lights	LED x 4 (optional)

Pump unit

Custom made to suit the net cleaners needs. Stand alone, complete solution with water-cooled diesel engine. Sound proofed cabinet. Digital control panel with 10 m cabel, self powered system



PARTS		SPEKS.
Equipment	Body and platform	Sound proofed steel cabinet with forklift pockets, single lifting lug on top
	Outer measures mm (LxWxH)	Ca. 3500 x 1200 x 2255
	Total weight	Ca. 2500 kg (dry)
Motor	model	FTP Iveco NEF67 TM 3A
	Type	Four stroke water-cooled diesel engine
	Slagvolum	6,7 l
High pressure pump		
	Nominal supply pressure	45 - 150 bar
	Nominal rotational speed	1500 rpm
	Nominal delivery volume	330 l/min
	Feed pump	Centrifugal pump 600 l/min
Fuel tank	Type	Plastic
	Total capacity	226 liter
CE approved		

Transport unit with drum for net cleaner and hose

Drum and transport device with electro hydraulic spooling. Optimal solution for easy transport and storage of Yanmar net cleaner. Rise for easy access under the cleaner. Remote operated.

PART		SPEKS.
Equipment with netcleaner and hose	Unit (platform)	Aluminium, coated
	Outer measures mm (LxWxH)	2270 x 2422 x 1879
	Total weight	1500 kg (dry)
Hydraulic device	El. motor	24V 1600W 1500rpm
Drum	Measures mm	Outer dia 1750, inner dia. 800
Spooling	m/min	22
Soft slings	4 pcs	4m 2 ton (green)
CE approved		

Do you want smart and safe cleaning too?

Contact Kim today



 5962 BJORDAL, NORWAY

 osterbo.no

 +47 48 16 17 18

 salg@osterbo.no



Kim André Eide
kim@osterbo.no



+47 994 46 984